


# Where To Use DYNA-SEAL™

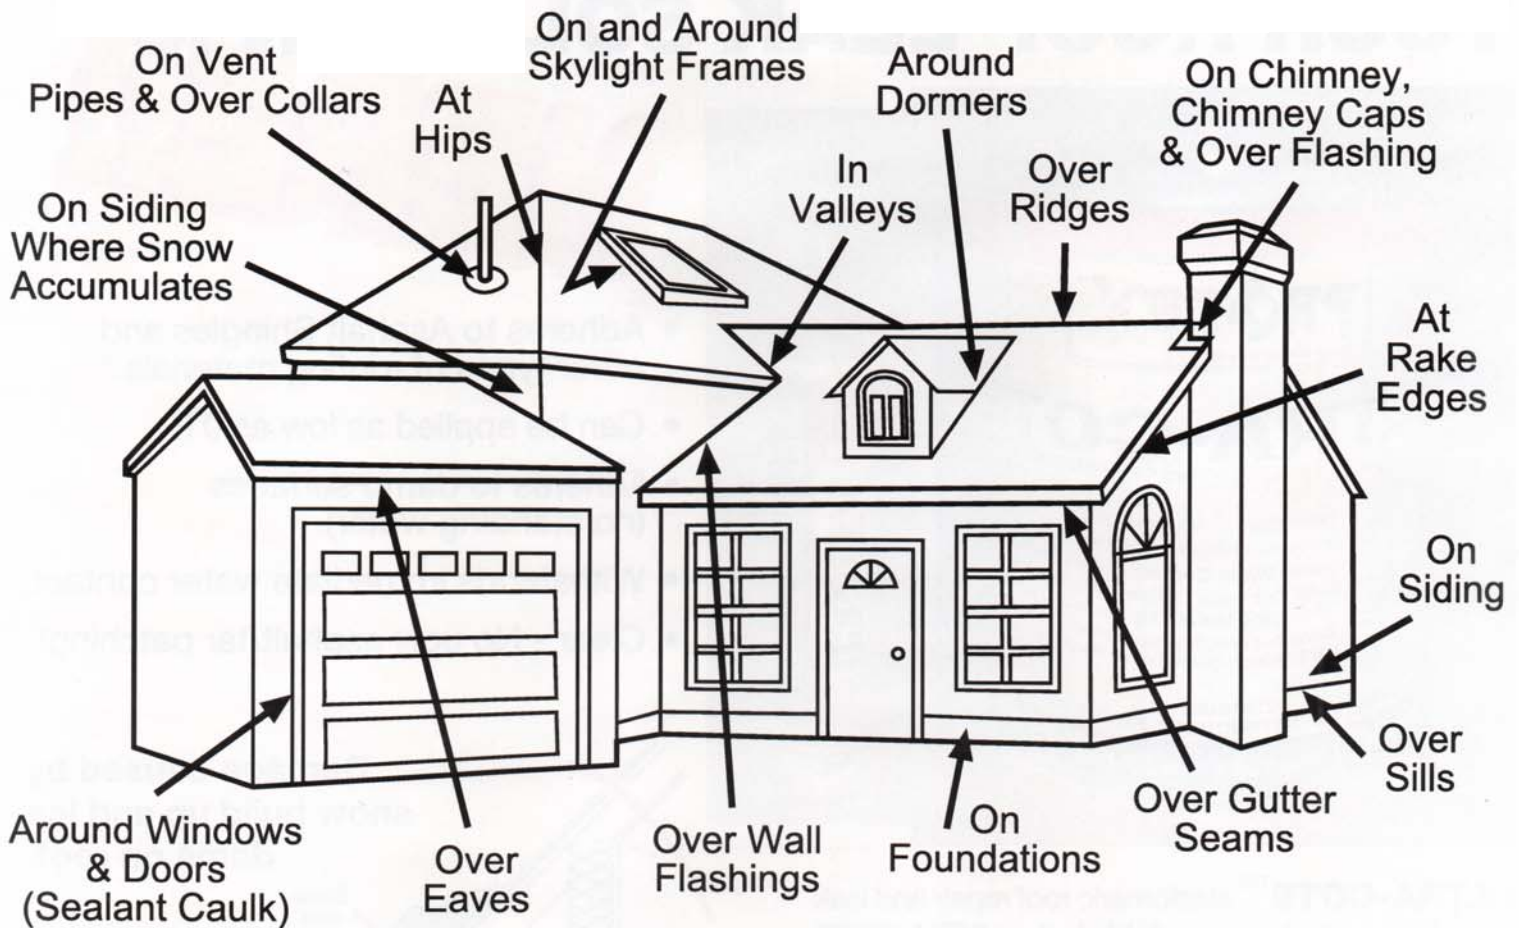

**DYNA-SEAL is recommended for joints and seams wherever dissimilar materials meet.**

**DYNA-SEAL** adheres to most common construction materials. It can be used most anywhere that water damage can occur. **No more ugly black tar or asphalt patches!**

**DYNA-SEAL** seals and waterproofs as well as moistureproofs<sup>\*\*</sup>: Concrete, Brick, Block, and Stone surfaces such as: Chimneys, Foundations and Sills, Retaining Walls, Storage Tanks, Catch Basins, and other Non-Trafficked Surfaces!

**DYNA-SEAL** seals and rustproofs all metal surfaces and clear coats copper. It seals, protects, and waterproofs Wood, Asphalt surfaces, Marble, Ceramic Tile, Fiberglass, Plastics, and Glass.

\* Not for use on EPDM rubber.

## Theoretical Yield:

Surface Type	Sealant Thickness	Yield (approx.)
Smooth (i.e. Sheet Metal)	1/16" (62 mils)	100 sq. ft.
Porous (i.e. Wood Shingles)	1/16" (62 mils)	25 sq. ft.

## TECHNICAL DATA:

Flash Point	108 degrees F
Tack Free Time	1 hour
Elongation	>600%
Application Temperature	0 degrees F to 140 degrees F
Service Temperature	-40 degrees F to 180 degrees F

<sup>\*\*</sup> Water Vapor Transmission 2.6 mg/sq. cm/24 hour

<sup>\*\*</sup> Water Vapor Permeance .21 (metric)

For more information or to order online go to:

**[www.dynasolv.com](http://www.dynasolv.com)**

or call 1-888-477-6839.

Dynamic Coating Solutions is a division of  
**CREATIVE MATERIAL TECHNOLOGIES, LTD.**  
 21 Wilbraham St., Unit B11, Palmer, MA 01069  
 ©Creative Material Technologies, Ltd.